


SPIRALI RILSAN® PA11

RILSAN® PA11 SPIRALS

Codice Code	Lunghezza Length				5 m		7,5 m		10 m		12 m		15 m		20 m		24 m		30 m	
	D	d	De	Di	Lc	La	Lc	La	Lc	La	Lc	La	Lc	La	Lc	La	Lc	La	Lc	La
	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.
S42XY	4	2	50	42	136	2500	205	3750	273	5000	328	6000	410	7500	546	10000	656	12000	820	15000
S425XY	4	2,5	50	42	136	2500	205	3750	273	5000	328	6000	410	7500	546	10000	656	12000	820	15000
S427XY	4	2,7	50	42	136	2500	205	3750	273	5000	328	6000	410	7500	546	10000	656	12000	820	15000
S53XY	5	3	62	52	145	2500	217	3750	290	5000	348	6000	435	7500	580	10000	696	12000	870	15000
S64XY	6	4	64	52	166	2500	250	3750	333	5000	400	6000	500	7500	666	10000	800	12000	1000	15000
S86XYP	8	6	66	50	230	2500	345	3750	460	5000	550	6000	690	7500	920	10000	1100	12000	1380	15000
S86XY	8	6	86	70	166	2500	250	3750	333	5000	400	6000	500	7500	666	10000	800	12000	1000	15000
S863XY	8	6,3	86	70	166	2500	250	3750	333	5000	400	6000	500	7500	666	10000	800	12000	1000	15000
S108XY	10	8	102	82	175	2500	262	3750	350	5000	420	6000	525	7500	700	10000	840	12000	1050	15000
S1210XY	12	10	126	102	175	2500	262	3750	350	5000	420	6000	525	7500	700	10000	840	12000	1050	15000
S1412XY	14	12	180	152	141	2500	212	3750	283	5000	340	6000	425	7500	566	10000	680	12000	850	15000
S1512XY	15	12	182	152	150	2500	225	3750	300	5000	360	6000	450	7500	600	10000	720	12000	900	15000
S15125XY	15	12,5	182	152	150	2500	225	3750	300	5000	360	6000	450	7500	600	10000	720	12000	900	15000
S1613XY	16	13	184	152	158	2500	237	3750	316	5000	380	6000	475	7500	632	10000	760	12000	950	15000
S1815XY	18	15	188	152	160	2500	240	3750	320	5000	384	6000	480	7500	640	10000	768	12000	960	15000
S2420XY	24	20	260	212	176	2500	220	3750	353	5000	353	6000	440	7500	586	10000	704	12000	880	15000

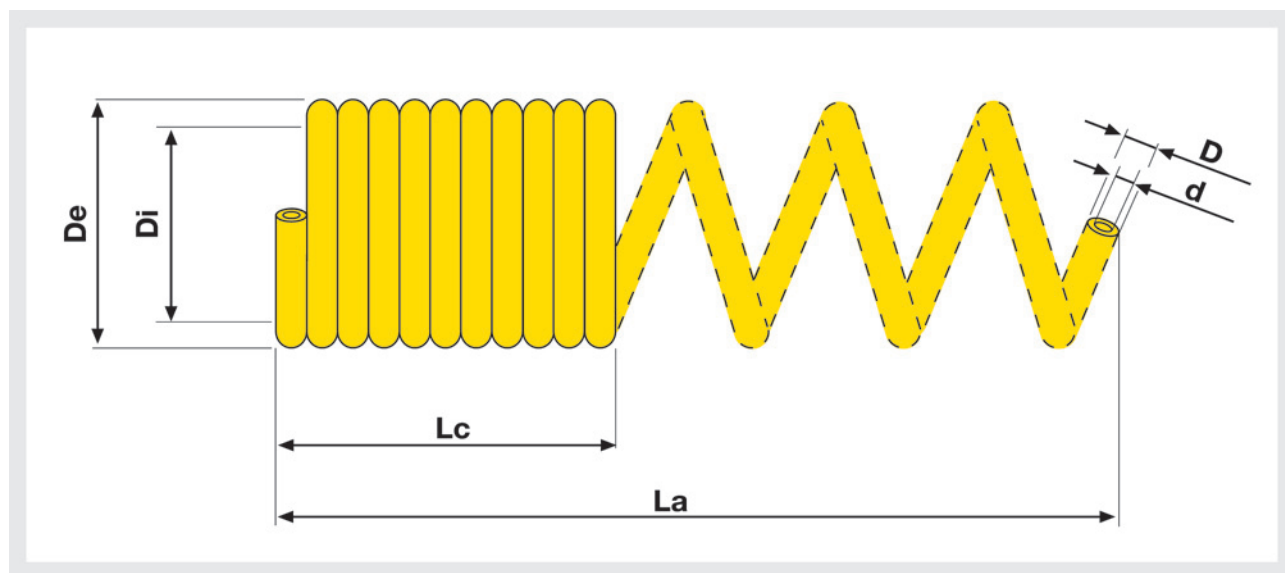

NB: Nel codice compare una X, bisogna sostituirla con la lettera del colore desiderato: BLU (B), ed ARANCIO (A), a richiesta altri colori; ed una Y, che corrisponde alla lunghezza della spirale.

ESEMPIO CODICE: Cod. S15125B10 - Spirale RILSAN® PA11 15x12,5 BLU da 10 m.

Temperature di utilizzo: da -40°C a $+80^{\circ}\text{C}$.

Per fluidi a base acquosa temperatura massima di esercizio $+70^{\circ}\text{C}$.

PRESSIONI: Pressioni di esercizio e scoppio come da scheda tecnica tubo corrispondente.

NB: There is an X in the code. This should be replaced with the letter representing the colour required: BLUE (B), and ORANGE (A), with other colours on request; and a Y, which corresponds to the length of the spiral.

CODE EXAMPLE: S15125B10 - RILSAN® PA11 Spiral 15x12,5 BLUE in lengths of 10 m.

Working temperature: from -40°C to $+80^{\circ}\text{C}$.

Max. working temperature of fluids containing water $+70^{\circ}\text{C}$.

PRESSURES: Working and bursting pressures as per the corresponding tube technical specification sheet.